



# XACTROL<sup>®</sup>

VALVTECHNOLOGIES


## Severe Service Control Valve ANSI 150-4500 1/2" - 36"




The Xactrol™ product group unites Valvtechnologies' zero-leakage technology with special designs that allow rotary modulating control. From Mark I design that features a characterized upstream seat, to the Mark III's precision engineered stacked disks, the Xactrol™ allows the customer to combine precise flow control with tight shutoff. The Xactrol™ is typically used in applications where minimum flow and relatively high differential pressures are required. It is available in sizes from 1/2" to 36" and in pressure classes ANSI 150 to 4500.

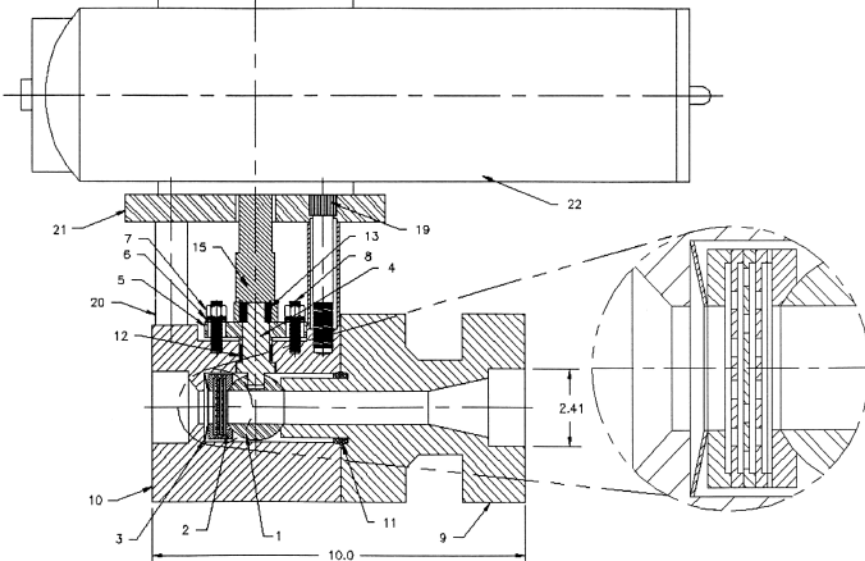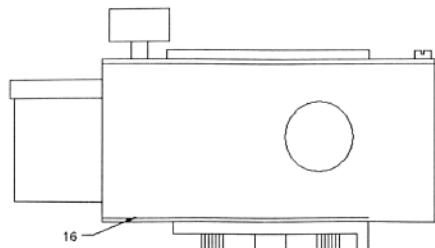

### COMMON CONFIGURATIONS

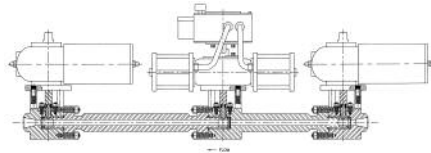

Xactrol Tandem Arrangement with Automated Isolation Valves

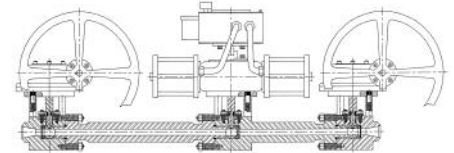

Xactrol Tandem Arrangement with Manual Isolation Valves

### BILLS OF MATERIAL

| ITEM | DESCRIPTION         | MATERIAL         | QTY. |
|------|---------------------|------------------|------|
| 1    | BALL                | 410 S.S./RAM31   | 1*   |
| 2    | UPSTREAM SEAT ASSY. | A182-F22/17-4    | 1*   |
| 3    | BELLVILLE SPRING    | INCONEL          | 1*   |
| 4    | STEM                | A638 GR. 660     | 1    |
| 5    | GLAND               | A182-F22/H.F.    | 1    |
| 6    | GLAND LOAD SPRING   | 304 S.S.         | 24   |
| 7    | GLAND NUT           | A194Gr. B8M      | 4    |
| 8    | GLAND STUD          | A194Gr. B8M      | 4    |
| 9    | END CAP             | A182-F22/RAM31   | 1*   |
| 10   | BODY                | A182-F22         | 1    |
| 11   | BODY GASKET         | 17-4 PH/GRAFOIL  | 3*   |
| 12   | GLAND PACKING       | GRAFOIL/316 S.S. | 3*   |
| 13   | KEY                 | STEEL            | 2    |
| 14   | -                   | -                | -    |
| 15   | DRIVE SLEEVE        | 4130             | 1    |
| 16   | POSITIONER          | -                | 1    |
| 17   | BODY STUD           | A193 Gr. B8M     | 6    |
| 18   | BODY NUT            | A193 Gr. B8M     | 6    |
| 19   | YOKE CAP SCREWS     | A193 Gr. B7      | 4    |
| 20   | YOKE POST           | STEEL            | 4    |
| 21   | YOKE PLATE          | STEEL            | 1    |
| 22   | PNEUMATIC ACTUATOR  | -                | 1    |

\* Recommended Spare Parts

Integral Seat, Four-Year Zero Leakage Guarantee





From simple minimum or normal flow control to full rangeability over a wide range of pressure drops and conditions, we have the solution for you.

Our Xactrol Mark I is designed for minimum or normal flow control conditions as is experienced in a large number of flow control applications. The Mark I comes with a variety of characterized upstream seats, which can be specifically engineered/ designed to suit your control needs.


The next step is the Mark II (see page 3). In addition to the normal flow conditions, the Mark II has a second flow port through the ball which is designed to handle your continuous minimum flow conditions.

For applications where very high pressure drops are required, we offer the Mark III (see page 3), which has a series of upstream pressure reducing plates. The plates will successfully reduce, stage by stage, the pressure in the system, which when combined with the full rangeability of control through the control ball and seat, will solve the toughest of control applications.

Regardless of the complexity of your control application, each of our customized engineered solutions, will be calibrated and tested on our state-of-the-art Flow Test Loop

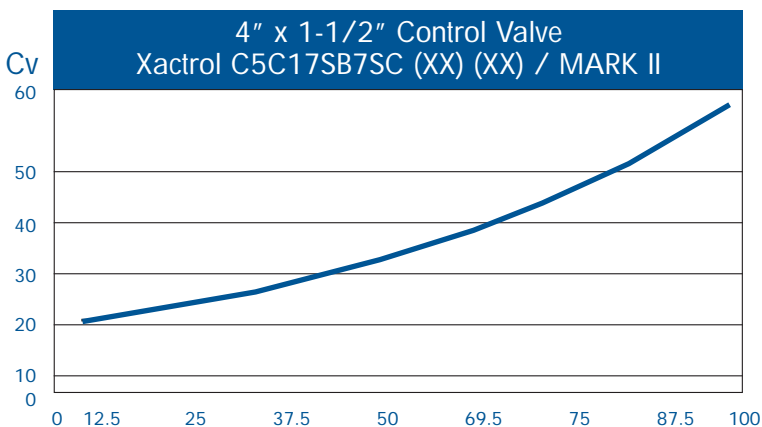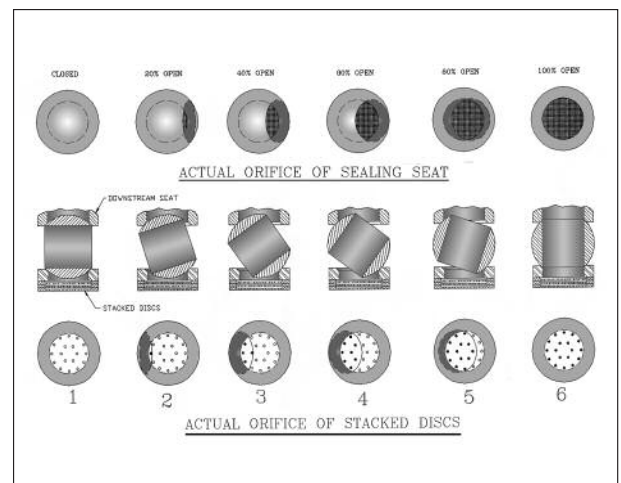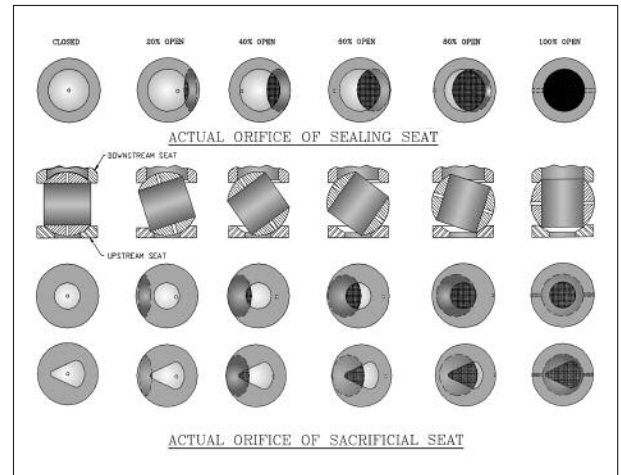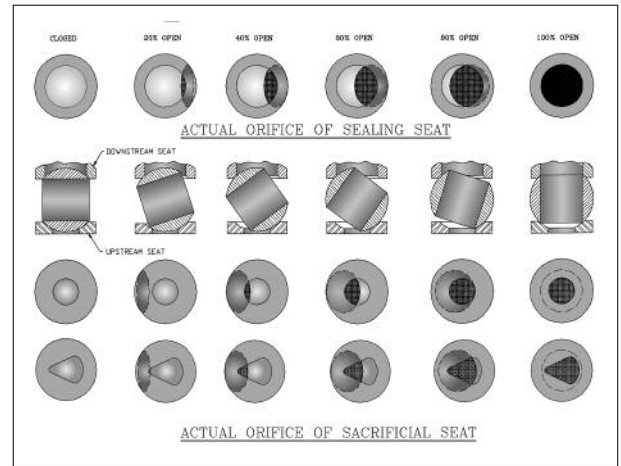

Each valve package will come complete with its own flow test curve to ensure complete reliability. Above graph is from an actual flow loop test, as supplied to the customer.

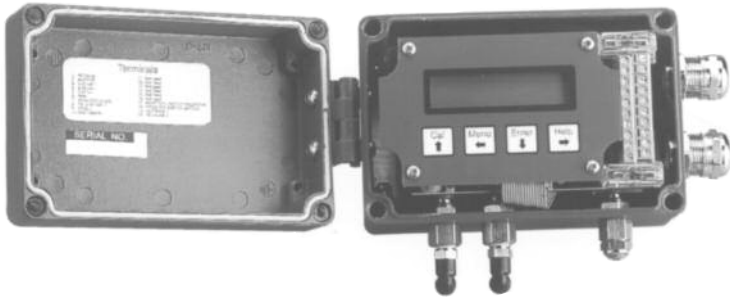

## Intelligent Valve Controller

### SPECIFICATIONS

EPP100 SR EEx " ib" for single acting actuators  
EPP100 DA EEx " ib" for double acting actuators

### 2-WIRE CURRENT LOOP CONTROL

The control signal is a "real" 2-wire 4-20 mA current loop, with power and control signal in the same loop. If loop failure occurs, then the valve returns to failsafe position.

### 4-20 mA FEEDBACK SIGNAL

### ACTUATORS

The controller is available for double acting and spring return pneumatic actuators.

### AUTO CALIBRATION

The self calibration routine sets all the basic settings and measures the actuator size for optimum valve control and fast feedback loop.

### LOW AIR CONSUMPTION

Air is only used when it is needed providing significant savings in instrument air costs.

### VALVE FLOW CHARACTERISTICS

Choice of integrated standard valve curve characteristics for ball control valves (equal percentage).

### MANUAL SETPOINT

In service situations the setpoint can be manually chosen from the user menu.

### FOUR BUTTON CONTROL PANEL

The four (4) button control panel makes each command sequence simple and easy to follow.

### MECHANICAL STABILITY

The compact design with few moving parts is insensitive to environmental influences providing a high degree of immunity from failure.

### DIGITAL COMMUNICATION

Up to thirty two (32) units can be linked via RS 485 communication interface to a PC or Laptop Computer for configuration and remote control.

### DIGITAL LCD DISPLAY

The two (2) lines of sixteen (16) digit alphanumeric display.

### POWER FAILURE OPTIONS

If power fails the controller will close the actuator. When power returns the controller will restart and regulate again with no loss of data and configuration.

### DIAGNOSTIC ALARMS

Internal diagnostic alarm is activated in the event of air failure or if the control valve does not operate and the local LCD display will show an error message.

## Technical Specifications

|                      |                               |
|----------------------|-------------------------------|
| Control Signal       | 2 wire 4 - 20 mA, 18-24V      |
| Feedback Signal      | 4-20 mA, passive transmitter  |
| Operating Temp Range | 21.6 -183.6 F°                |
| Hysteresis           | 0.8%                          |
| Linearity            | <1%                           |
| Sensitivity          | 0.4%                          |
| Air Supply           | 0 - 100 psi (0 - 7 Bar)       |
| Air Consumption      | @ 0                           |
| Air Flow             | 50 l/min                      |
| Air Filtering        | <30 um                        |
| Air Entry            | 1/4" NPT                      |
| Electrical Entry     | 2 x M20, 1.5 mm2              |
| Dimensions           | L x B x H = 5.9 X 5.9 X 3.94" |
| Housing              | Stainless steel 316 ss        |
| Ingress Protection   | IP 65                         |
| Weight               | 4.185 lbs.                    |
| Maximum Rotation     | 300°                          |

## Dynamics of Mark III Xactrol Control Valve

Upstream pressure reducing plates are stacked so maximum flow (pressure) travels through plate A (Fig. 3) then splits and pressure continues to be reduced as flow proceeds to follow tortuous 90° paths through succeeding holes in various stacked pressure reducing plates, see plates B, C & D (Fig. 3).

Multi-stage pressure reducing plates are positioned such that the diverging streams through the various plates actually collide with each other – greatly reducing their energy – before entering the next plate (Fig. 1).

Pressure reduction is at the upstream side of the valve, thus reducing the torque required to open and close the valve.

Downstream sealing face is protected from flow, thus offering repeatable tight shut-off.

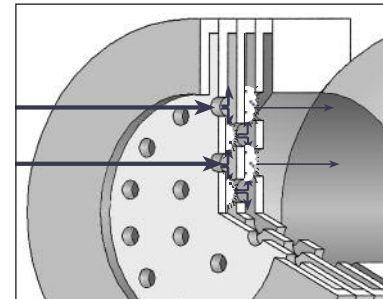


Figure 1

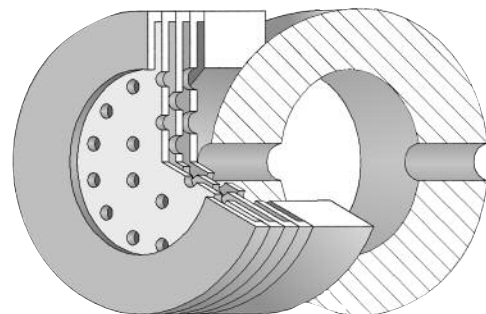


Figure 2

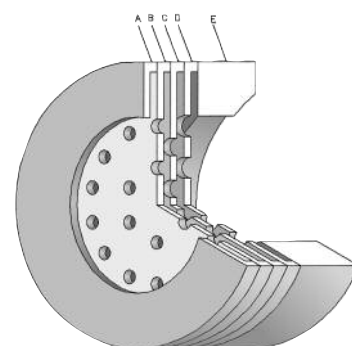


Figure 3



ValvTechnologies, Inc. is a global leader in the design and manufacturing of flow control devices. Founded in 1987 and headquartered in Houston, Texas, ValvTechnologies remains focused on helping customers meet their daily production and process challenges safely and efficiently.

Having built a global reputation for superior quality and dependability across every industry served with products designed to fulfill the requirements of standard applications to the most sophisticated, severe-service processes, ValvTechnologies meets the demands for total flow control solutions, whether one valve at a time, or system-wide.

Bringing together the best people and the latest in technological design and manufacturing processes, ValvTechnologies has created an atmosphere where quality and dependability are built into every product, start to finish.

## Corporate Offices and Manufacturing

### Headquarters

ValvTechnologies, Inc.  
5904 Bingle Road  
Houston, Texas 77092 U.S.A.  
Telephone +1 713 860 0400  
Fax +1 713 860 0499  
[sales@valv.com](mailto:sales@valv.com)

Master distributors in:

- **The Americas**
- **Europe**
- **Asia**
- **Africa**
- **Middle East**
- **India**
- **Australasia**
- **China**

To locate a master distributor or satellite office near you, visit us online at:

**[www.valv.com](http://www.valv.com)**